U·LINK



UL-24WIR25-IP

4CH Plug & Play WiFi IP Camera Kit

POWERING THE FUTURE



Features

- 1 NVR (Built With WiFi Antenna)
- 4 wireless Cameras.
- IP67 Outdoor.
- Onvif 2.4.
- Support 1SATA Up To 8TB Capacity.

Specification

Package

NVR	1 NVR3608PGEW
Camera	4 LBH30FE200W
WiFi Range	No Obstacles 300m Max
Cable	1m Net Cable
Mouse	1 USB 2.0 Mouse
Adaptor	1 DC 12V 2A For WiFi NVR, 4xDC 12V 0.5A For WiFi IP Camera
Weight	5.3kg/Set
Camera Model	UL-24WIR25-IP

Camera

Image Sensor	1/2.9" Full HD CMOS Sensor
Resolution	2MP
Effective Pixels	1920x1080p
Compression	H.264/H.264+/H.265/H.265+
TV System	PAL Default
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec
S/N Ratio	≥52dB
Scanning System	Progressive
Video Outout	Wireless Network
Reset Button	Yes

Lens Type

Focus Length	3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	2MP

Night Vision

Infrared LED	14u × 20 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Auto Control

Wireless

Antena	3dbi
Hotspot	No
WiFi	WiFi (IEEE802.11b/g/n)
WiFi Range	No Obstacles 300m Max

Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation/Brightness/Contrast/Sharpness/Mirror/White Balance/FLK (Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR

Video

Input	9CH (2592x1944, 2048x1536, 1920×1080, 1280×960, 1280×720, etc)
Output	1 VGA, 1 HD

Audio

Outout	1 Port RCA (Linear,1k)
Audio Bit Rate	64kbps
Audio Compression Standard	G711u, G711a, G726

Alarm

Sensor Input	No
Output	No
Motion Detection	9CH, MD Zones: 396 (22×18)
Trigger Events	Recording, Email, FTP, Snapshot, Buzzer & Screen Tips, Alarm Output

AI Function

Face Comparison	1CH Video Stream Face Comparison (1 Face Databases With 10 Face Images)

Display

HD1	Resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
VGA	Resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60H
Display Split	9CHxD1/8CHxD1/4CHxD1/1CH×1080P/1CH×3MP/1CH×4MP/1CH×5MP
Digital Zoom	Yes
OSD	Camera Title, Time, Recording, Motion Detection, Alarm

Recording

Video Compression	H.264/H.265/H.264+/H.265+
Resolution	5MP(2592×1944), 4MP(2688×1520), 3MP(2048×1536), 1080P(1920×1080), 960P(1280×960), 720P(1280×720), D1(720×576/720×480)
Record Rate	PAL: 5MP@9×25fps, 4MP@9x25fps, 3MP@9×25fps, 1080P@9×25fps, 960P@9×25fps, 720P@9×25fps, D1@9×25fps NTSC: 5MP@9×30fps, 4MP@9×30fps, 3MP@9×30fps, 1080P@9x30fps, 960P@9×30fps, 720P@9×30fps, D1@9×30fps
Record Mode	Manual Timer\Motion Detection\Smart Alarm

Playback & Backup

Local Sync Playback	1CH 5MP@30fps, 1CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@20fps,
	4CH 960P@30fps, 4CH 720P@30fps
Decode Capability	4CH 1080P@20fps
Remote Sync Playback	Yes
Search Mode	All, Channel, Manual, Time, Date, Motion Detection, Event Alarm
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow Play, Full Screen, Frame Play ,
	Frame Rewind, Digital Zoom
Backup Mode	Network USB (With USB Hub)

Network

Protocol	TCP/IP,ICMP,RTP,RTSP,RTCP
Main Stream 1	1920x1080@1-15fps(Default Resolution:1920x1080/Frame Rate:15fps/Bit Rate:1Mbps)
Sub Stream 1	720x480@1-15fps(Default Frame Rate:15fps/Bit Rate:0.5Mbps)
Interface	1 RJ45 10M/100M Adaptive Ethernet Interface
Incoming Bandwidth	60MB
Network Functions	TCP/CP, HTTP, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTP, RTSP, RTCP, p2p
Onvif Version	Support Onvif 2.4
Web Browser	IE8-11, Google Chrome (Lower Than Ver44), Firefox (Lower Than Ver53)
CMS Software	Support Windows 7/Windows 8/Windows 10
Cloud Support (P2P)	Yes
Smart Phone	IPhone, IPad, Android, Android Pad
WiFi	Support, WiFi Range: No Obstacles 300m Max.

System

Main Processor	ARM Cortex A7 Quad-Core Processor
Operating System	Embedded LINUX

Storage

Interface Type	1SATA Hard Disk Interface (2.5"/3.5" SATA)
Capacity	Up To 8TB Capacity

General

Language	English, Polish, Czech, Russian, Thai, Hebrew, Arabic, Bulgarian, German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian, Korean, Dutch, Greek, Vietnamese
USB Interface	1 USB 2.0 Interfaces
Power Supply	DC12V/2A
Working Environment	-10 ~ +55°C/10 ~ 90%
Housing	Metal, IP67 Outdoor kit
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension WxHxD	Φ157x70x66mm
Weight	650g
Model	NVR3608PGEW



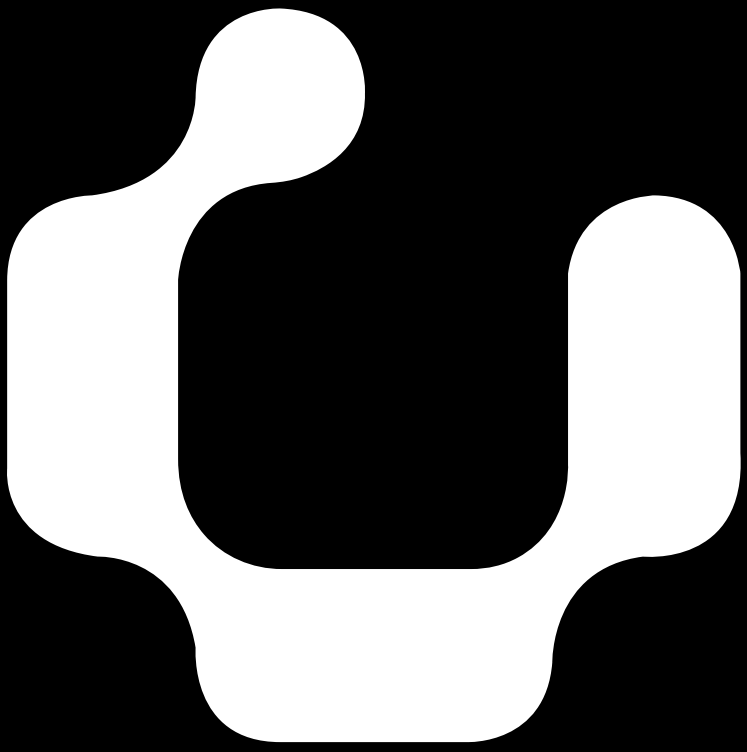

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk