U·LINK

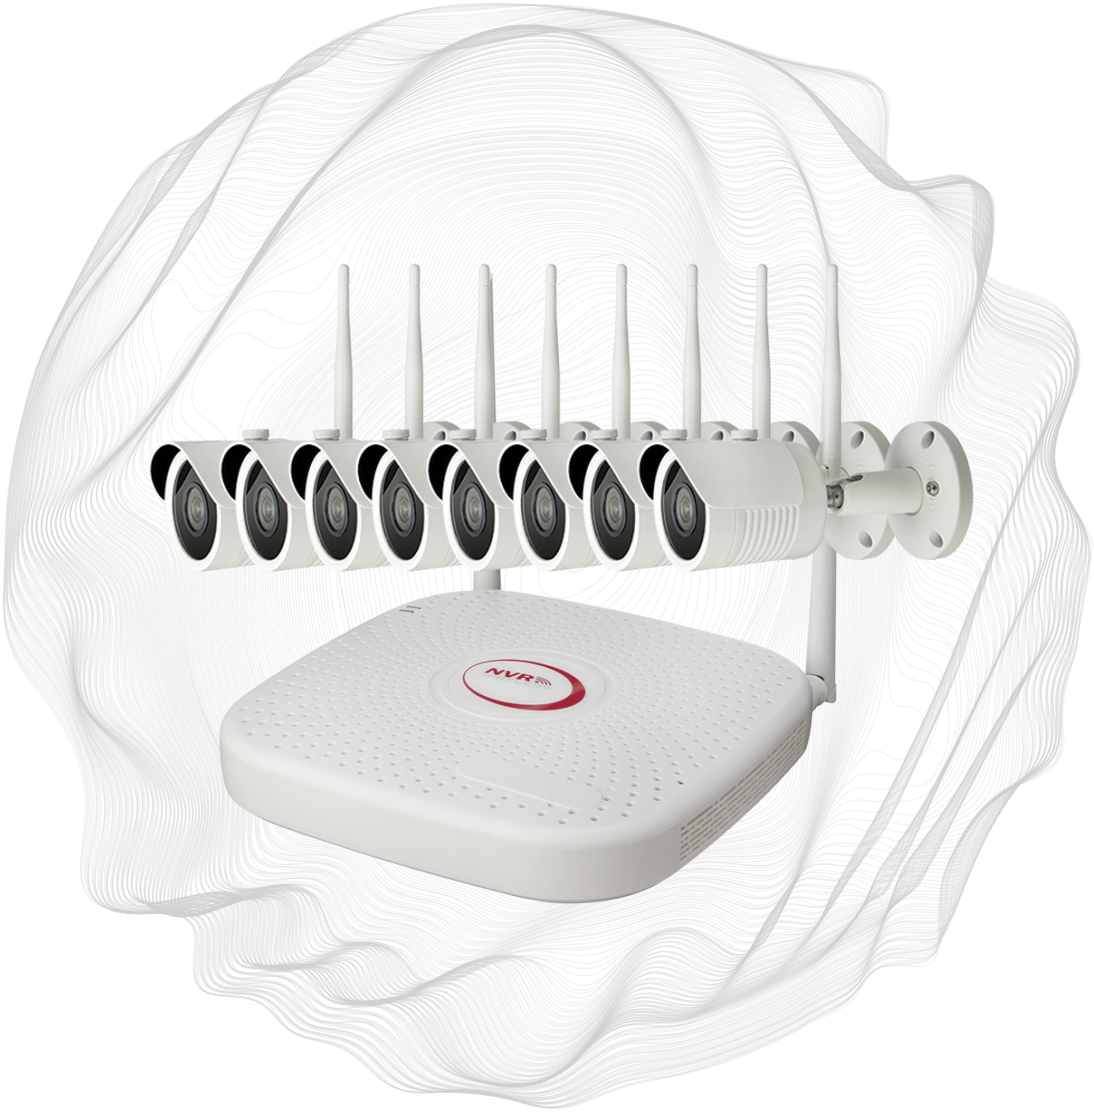

UL-28WIR25-IP

8CH Plug & Play WiFi IP Camera Kit

POWERING THE FUTURE



Features

- 1 NVR (Built With WiFi Antenna)
- 8 wireless Cameras.
- IP67 Outdoor.
- Onvif 2.4.
- Support 1SATA Up To 8TB Capacity.

Specification

Package

NVR	1 NVR3608PGEW
Camera	8 LBH30FE200W
WiFi Range	No Obstacles 300m Max
Cable	1m Net Cable
Mouse	1 USB 2.0 Mouse
Adaptor	1 DC 12V 2A For WiFi NVR, 4xDC 12V 0.5A For WiFi IP Camera
Weight	9.9kg/Set
Camera Model	UL-28WIR25-IP

Camera

Image Sensor	1/2.9" Full HD CMOS Sensor
Resolution	2MP
Effective Pixels	1920x1080p
Compression	H.264/H.264+/H.265/H.265+
TV System	PAL Default
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec
S/N Ratio	≥52dB
Scanning System	Progressive
Video Outout	Wireless Network
Reset Button	Yes

Lens Type

Focus Length	3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	2MP

Night Vision

Infrared LED	14u × 20 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Auto Control

Wireless

Antena	3dbi
Hotspot	No
WiFi	WiFi (IEEE802.11b/g/n)
WiFi Range	No Obstacles 300m Max

Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation/Brightness/Contrast/Sharpness/Mirror/White Balance/FLK (Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR

Video

Input	9CH (2592x1944, 2048x1536, 1920×1080, 1280×960, 1280×720, etc)
Output	1 VGA, 1 HD

Audio

Outout	1 Port RCA (Linear,1k)
Audio Bit Rate	64kbps
Audio Compression Standard	G711u, G711a, G726

Alarm

Sensor Input	No
Output	No
Motion Detection	9CH, MD Zones: 396 (22×18)
Trigger Events	Recording, Email, FTP, Snapshot, Buzzer & Screen Tips, Alarm Output

AI Function

Face Comparison	1CH Video Stream Face Comparison (1 Face Databases With 10 Face Images)

Display

HD1	Resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
VGA	Resolution: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60H
Display Split	9CHxD1/8CHxD1/4CHxD1/1CH×1080P/1CH×3MP/1CH×4MP/1CH×5MP
Digital Zoom	Yes
OSD	Camera Title, Time, Recording, Motion Detection, Alarm

Recording

Video Compression	H.264/H.265/H.264+/H.265+
Resolution	5MP(2592×1944), 4MP(2688×1520), 3MP(2048×1536), 1080P(1920×1080), 960P(1280×960), 720P(1280×720), D1(720×576/720×480)
Record Rate	PAL: 5MP@9×25fps, 4MP@9x25fps, 3MP@9×25fps, 1080P@9×25fps, 960P@9×25fps, 720P@9×25fps, D1@9×25fps NTSC: 5MP@9×30fps, 4MP@9×30fps, 3MP@9×30fps, 1080P@9x30fps, 960P@9×30fps, 720P@9×30fps, D1@9×30fps
Record Mode	Manual Timer\Motion Detection\Smart Alarm

Playback & Backup

Local Sync Playback	1CH 5MP@30fps, 1CH 4MP@30fps, 2CH 3M@30fps, 4CH 1080P@20fps,
	4CH 960P@30fps, 4CH 720P@30fps
Decode Capability	4CH 1080P@20fps
Remote Sync Playback	Yes
Search Mode	All, Channel, Manual, Time, Date, Motion Detection, Event Alarm
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow Play, Full Screen, Frame Play,
	Frame Rewind, Digital Zoom
Backup Mode	Network USB (With USB Hub)

Network

Protocol	TCP/IP,ICMP,RTP,RTSP,RTCP
Main Stream 1	1920x1080@1-15fps(Default Resolution:1920x1080/Frame Rate:15fps/Bit Rate:1Mbps)
Sub Stream 1	720x480@1-15fps(Default Frame Rate:15fps/Bit Rate:0.5Mbps)
Interface	1 RJ45 10M/100M Adaptive Ethernet Interface
Incoming Bandwidth	60MB
Network Functions	TCP/CP, HTTP, UPnP, DNS, NTP, SMTP, DHCP, FTP, DDNS, RTP, RTSP, RTCP, p2p
Onvif Version	Support Onvif 2.4
Web Browser	IE8-11, Google Chrome (Lower Than Ver44), Firefox (Lower Than Ver53)
CMS Software	Support Windows 7/Windows 8/Windows 10
Cloud Support (P2P)	Yes
Smart Phone	IPhone, IPad, Android, Android Pad
WiFi	Support, WiFi Range: No Obstacles 300m Max.

System

Main Processor	ARM Cortex A7 Quad-Core Processor
Operating System	Embedded LINUX

Storage

Interface Type	1SATA Hard Disk Interface (2.5"/3.5" SATA)
Capacity	Up To 8TB Capacity

General

Language	English, Polish, Czech, Russian, Thai, Hebrew, Arabic, Bulgarian, German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian, Korean, Dutch, Greek, Vietnamese
USB Interface	1 USB 2.0 Interfaces
Power Supply	DC12V/2A
Working Environment	-10 ~ 55°C/10 ~ 90%
Housing	Metal, IP67 Outdoor kit
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension WxHxD	Φ157x70x66mm
Weight	650g
Model	NVR3608PGEW



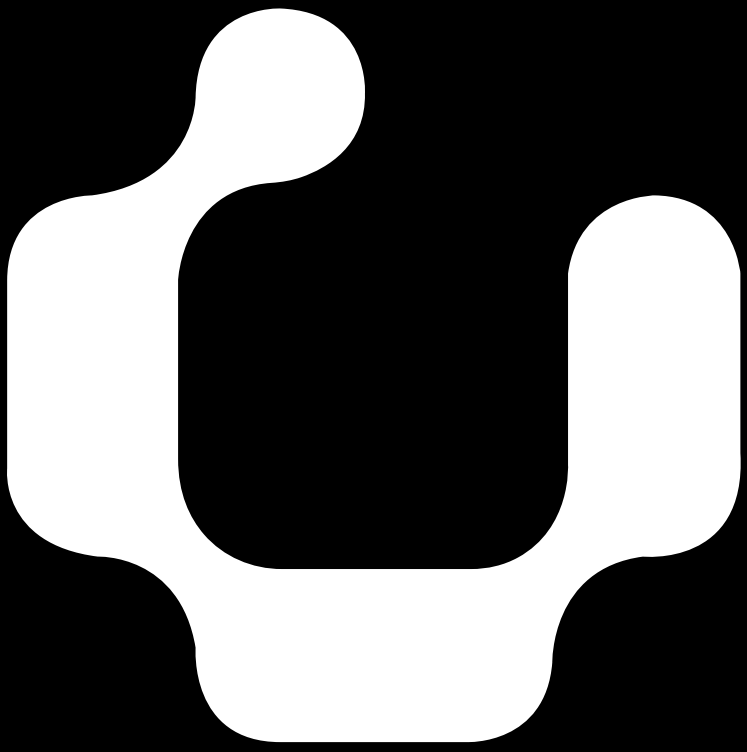

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk