U·LINK



UL-2BIR60V-IP

2MP Outdoor Bullet Camera VF Lens

POWERING THE FUTURE



Features

- 1/2.8”SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 2.8-12mm Motorized Lens.
- IR Distance 60m Max.
- With Internal POE & External SD Card Slot.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	2MP
Effective Pixels	1920x1080
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.005 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
AGC Control	Auto/Manual

Lens

Focus Length	2.8-12mm Motor Zoom
Focus Control	Auto
Lens Type	Auto
Pixels	2MP

Night Vision

Infrared LED	42μ x 6 PCS
Infrared Distance	60m
IR Status	Auto Control
IR Power On	Auto Control

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP,RTCP, NTP, SMTP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	1920x1080@30fps
Main Stream 2	1280x720@30fps
Sub Stream 1	720x480@20fps - 720x480@30fps
Tri Stream	352x288@20fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome (Lower Than Ver44), Firefox (Lower Than Ver53), Mac Safari (Lower Than Version 12)
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection
Recognition	Face Detection & Recognition Number Of Faces Per Frame: 32 Capture Rate: >99.5% Repeat Capture Rate: <15% False Capture Rate: <0.5% Number Of Supported Faces: 10000 Minimum Detection Of Face Pixels: 25x25 Maximum Detection Of Face Pixels: 300x300

Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering
Defog Mode	Support
ROI	Support
BLC	Support
WDR	HDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web

Interface

Audio	Audio In/Out By Line
Alarm	1CH Input/Output
SD Card Slot	Support Max 512GB
RS485	Support

General

Housing	Metal ,IP67
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1100mA
Dimension WxHxD	Φ220x109x106mm
Weight	2.15Kgs



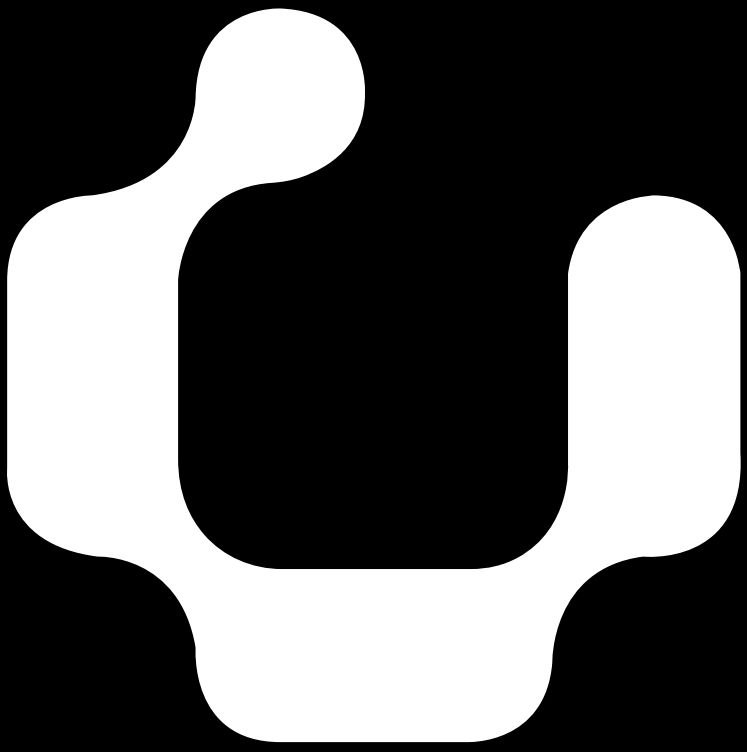

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk