U·LINK



UL-2DIR20FP-IP

2MP Indoor Dome Camera Fixed Lens

POWERING THE FUTURE



Features

- 1/2.9" Full HD CMOS Sensor.
- Fixed Lens 2.8mm.
- Minimun Illumination 0.01 Lux @ Color Mode.
- Infrared Distance 20m.
- DWDR.

Specification

Camera

Image Sensor	1/2 9" Full HD CMOS Sensor
Resolution	2MP
Effective Pixels	1920x1080p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux @ Color Mode
S/N Ratio	60dB
Scanning System	Progressive
Video Output	Network
AGC	Support

Lens

Focal Length	2.8mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	2MP

Night Vision

Infrared LED	14μ x 18 PCS
Infrared Distance	20m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP ,DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	Yes
POE	Support IEEE 802.3af
Main Stream 1	2304x1296@20fps
Main Stream 2	1920x1080@30fps
Main Stream 3	1280x720@30fps
Sub Stream 1	720x480@30fps
Sub Stream 2	352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control)
Corridor Pattern	Support
Defog Mode	Support
BLC	Support
WDR	DWDR
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web

Interface

Audio	Yes

General

Housing	Plastic
Anti-Cut Bracket	Optional Wall Barcket
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 750mA
Dimension WxH	Φ99x81mm
Weight	300g

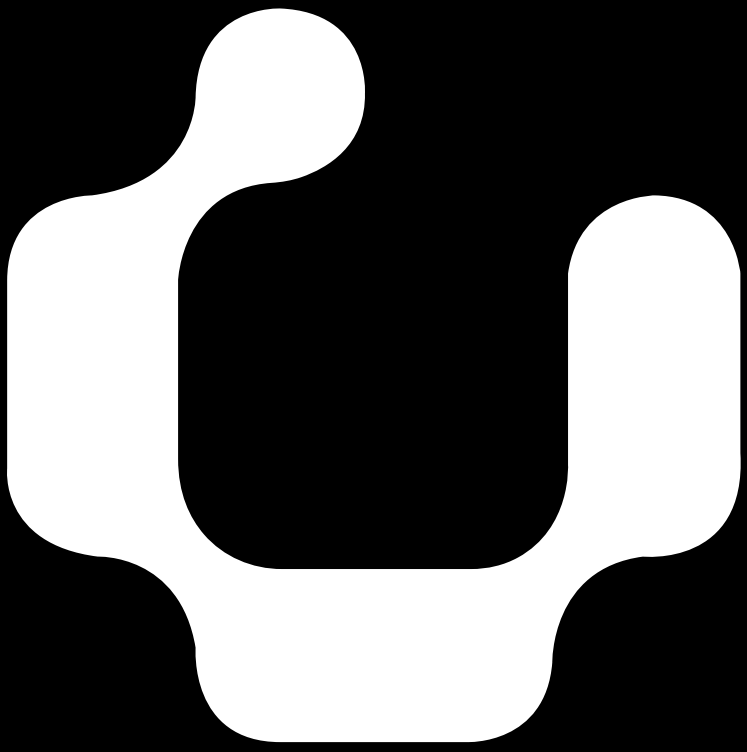

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk