U·LINK



UL-2DIR25F-IP

2MP Outdoor Dome Camera Fixed Lens

POWERING THE FUTURE



Features

- Pro IP Dome Camera.
- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 3.6mm Fixed Lens.
- IR Distance 25m Max.
- With Internal POE.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	2MP 1080p
Effective Pixels	1945x1097p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
Audio Compression	G711A/U, AAC
TV System	PAL/NTSC
Electronic Shutter Time	Auto: 1/3-1/100000Sec
Minimun Illumination	Color: 0.001 Lux @ (F1.6, AGC On), B/W: 0 Lux With IR On
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focal Length	3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	2MP

Night Vision

Infrared LED	42μ x 2 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Wireless	N/A
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP, UDP, SNMP
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes
POE	Optional, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	2304x1296@30fps
Main Stream 2	1920x1080@30fps
Main Stream 3	1280x720@30fps
Sub Stream 1	1280x720@30fps
Sub Stream 2	720x480@30fps
Sub Stream 3	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Occlusion Detection, HLC, Distortion
Full Color	N/A
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Turkish, Spanish, Hebrew, Italian

Interface

Audio	Optional 1 Built-in MIC
Alarm	Optional 1CH Input/Ouput
SD Card Slot	Optional Internal, Support Max 1TB,Built in 4G Storage
RS485	N/A

General

Housing	Metal ,IP67
Anti-Cut Bracket	No
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V+10%, 700mA
Dimension WxH	Φ128x108mm
Weight	800g

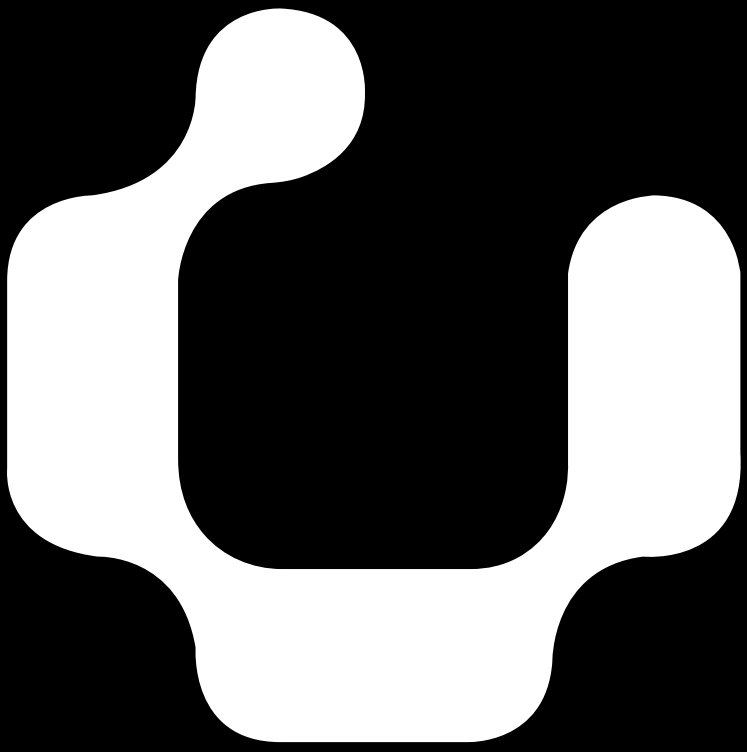

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk