U·LINK



UL-2DIR30EV-AHD

2MP Indoor Dome Camera VF Lens

POWERING THE FUTURE



Features

- 1/3'' CMOS F37P.
- Lens 2.8-12mm Focal Length.
- Infrared Distance 30m.
- IP66 Metal Housing.

Specification

Camera

Image Sensor	1/3'' CMOS F37P
Resolution	2MP
Effective Pixels	1920x1080p
Illumination	0.1 Lux @ Color, 0.01 Lux @ Black & White
TV System	PAL/NTSC
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s
S/N Ratio	≥50dB
Scanning System	Progressive

Lens

Length	2.8-12mm
Pixels	2MP
Auto Iris support	No

Night Vision

Infrared LED	14µ x 24 PCS
Infrared Distance	30m
IR Status	Under 10 Lux By CDS
IR Power On	CDS Auto Control

Camera Features

Day/Night	Yes/No
OSD Menu Language	Yes
White Balance	Auto/Manual
Gain Control	Auto
Noise Reduction	3DNR
OSD Support	Option
UTC	Yes
Dip Switch	Option

General

Housing	Metal Housing IP66
Housing color	White
Dual Voltage	DC-12V
IR Cut Filter	Yes
Operation Temperature	-20°C - +50°C RH95% Max
Storage Temperature	-30°C ~ +50°C RH95% Max
Power Source	DC12V±10%, 550mA
Dimension WxH	Ø131x93mm
Weight	800g



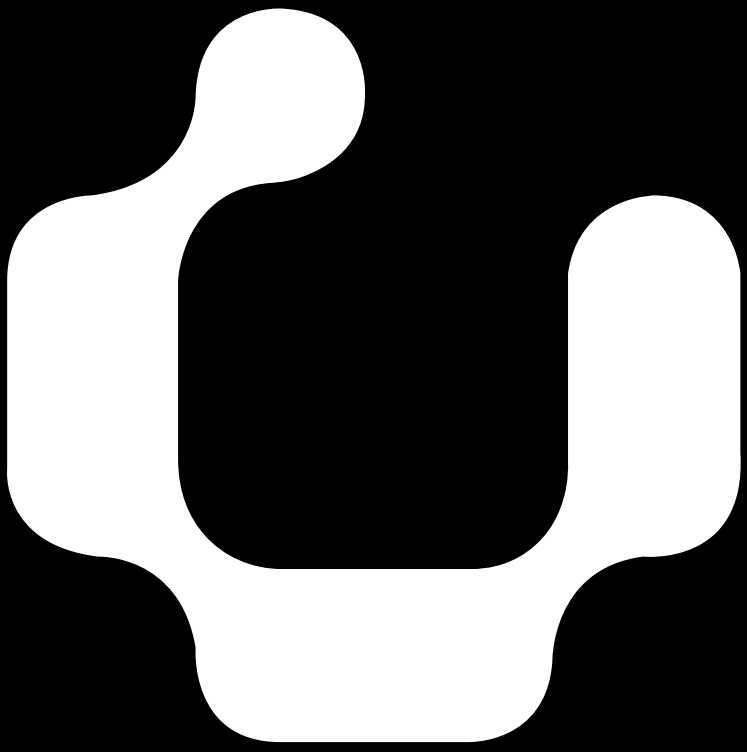

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk