U·LINK



UL-2DIR30V-IP

2MP Outdoor Dome Camera VF Lens

POWERING THE FUTURE



Features

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG Compression Method.
- 2.8-12mm Varifocal Lens.
- IR Distance 30m Max.
- IP67.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	2MP 1080P
Effective Pixels	1945x1097p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.005 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focal Length	2.8-12mm
Focus Control	Manual
Lens Type	Varifocal
Pixels	2MP

Night Vision

Infrared LED	14μ x 24 PCS
Infrared Distance	30m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Wireless	N/A
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP, UDP, SNMP
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Optional, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	2304x1296@25fps
Main Stream 2	1920x1080@30fps
Main Stream 3	1280x720@30fps
Sub Stream 1	1280x720@30fps - 720x480@30fps
Sub Stream 2	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection, Motion Detection Based On Human Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC, Distortion
Full Color	N/A
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	HDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional Audio In/Out
SD Card Slot	Optional Internal, Support Max 512GB

General

Housing	Metal ,IP67
Anti-Cut Bracket	Optional Wall Bracket
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 950mA
Dimension WxH	Φ119x98mm
Weight	800g

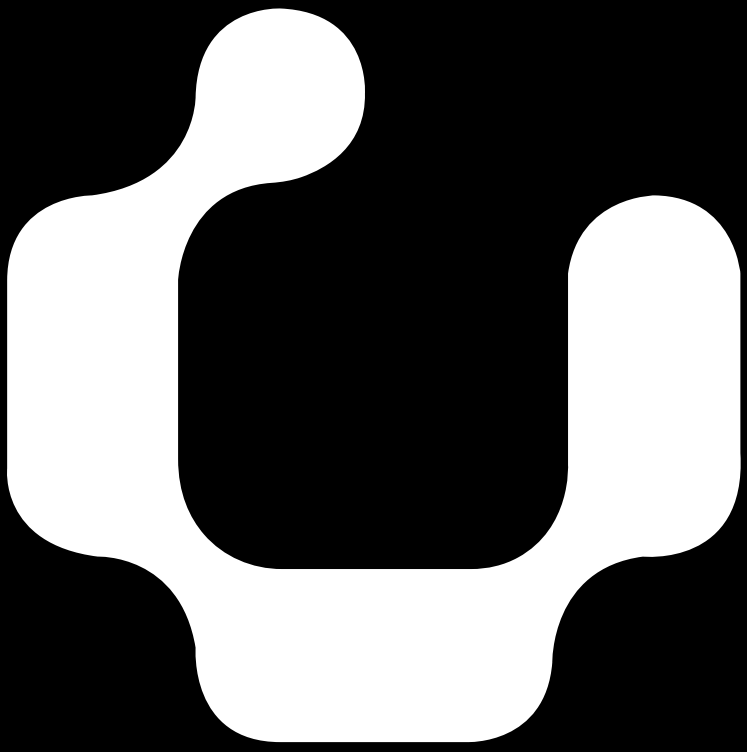

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk