U·LINK



UL-32NVR4K48-IP

32CH 4K/8MP with 4SATA Interface NVR

POWERING THE FUTURE



Features

- Support Ultra265/H.265/H.264 Video Formats.
- 32CH Input.
- Third-Party IP Cameras Supported With ONVIF Conformance: Profile S, Profile G, Profile T.
- HDMI & VGA Simultaneous Output.
- Up To 8 MP Resolution Recording.
- Accurate Retrieval, Instant Playback.
- 4SATA HDDs, Up To 10TB For Each HDD.
- ANR Technology To Enhance The Storage Reliability When The Network Is Disconnected.
- Support Cloud Upgrade.

Specification

Video/Audio Input

IP Video Input	32CH
Two-Way Audio Input	1CH, RCA

Network

Incoming Bandwidth	160Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPOE

Video/Audio Output

HDMI/VGA Output	HDMI: 4K (3840x2160)@30, 1920x1080p@60, 1920x1080p@50, 1600x1200@60, 1280x1024@60, 1280x720@60, 1024x768@60 VGA: 1920x1080p@60, 1920x1080p@50, 1280x1024@60, 1280x720@60, 1024x768@60
Audio Output	1CH, RCA
Recording Resolution	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF
Synchronous Playback	32CH
Corridor Mode Screen	3/4/5/7/9/10/12/16/32

Decoding

Decoding Format	Ultra 265/H.265/H.264
Live view Playback	8MP/5MP/4MP/3MP/1080p/960p/720p/960H/D1/2CIF/CIF
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30, 32 x D1

Hard Disk

SATA	4SATA Interface
Capacity	Up To 10TB For Each HDD

External Interface

Network Interface	2 RJ-45 10M/100M/1000M Self-Adaptive Ethernet Interfaces
USB Interface	Rear panel: 1 USB2.0, 1 USB3.0 Front panel: 1 USB2.0

General

Power Supply	12V DC Power Consumption: < 15 W (Without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity < 90%RH (Non-Condensing)
Dimensions WxDxH	Φ440x344x50mm (17.3" x13.5" x2.0")
Weight	≤ 3.15 Kg (6.94 lb) (Without HDD)



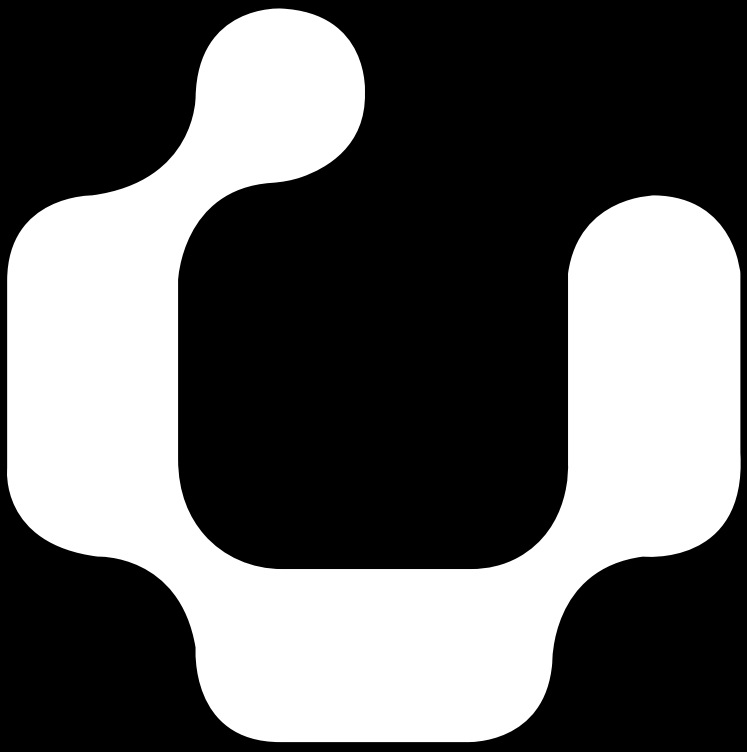

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk