U·LINK



UL-5BIR25F-IP

5MP Outdoor Bullet Camera Fixed Lens

POWERING THE FUTURE



Features

- 1/2.5" High-Resolution CMOS Sensor.
- H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG Compression Method.
- Fixed Lens 3.6mm.
- Infrared Distance 25m Max.
- IP67 Outdoor Metal Case.

Specification

Camera

Image Sensor	1/2.5" High-Resolution CMOS Sensor
Resolution	5MP
Effective Pixels	2608x1952p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focus Length	3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	5MP

Night Vision

Infrared LED	14μ x 20 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Optional/Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	2592x1944@20fps - 2560x1920@20fp
Main Stream 2	2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	720x480@20fps - 720x480@30fps
IE Browser	IE8-11, Google Chrome, Firefox , Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control)
Corridor Pattern	Support
BLC	Support
WDR	DWDR: 50dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	Chinese Simplified, Chinese Tradional, English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional
SD Card Slot	Optional, Support Max 512GB

General

Housing	Metal ,IP67 Outdoor Camera
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension WxHxD	Φ158x76x73mm
Weight	650g

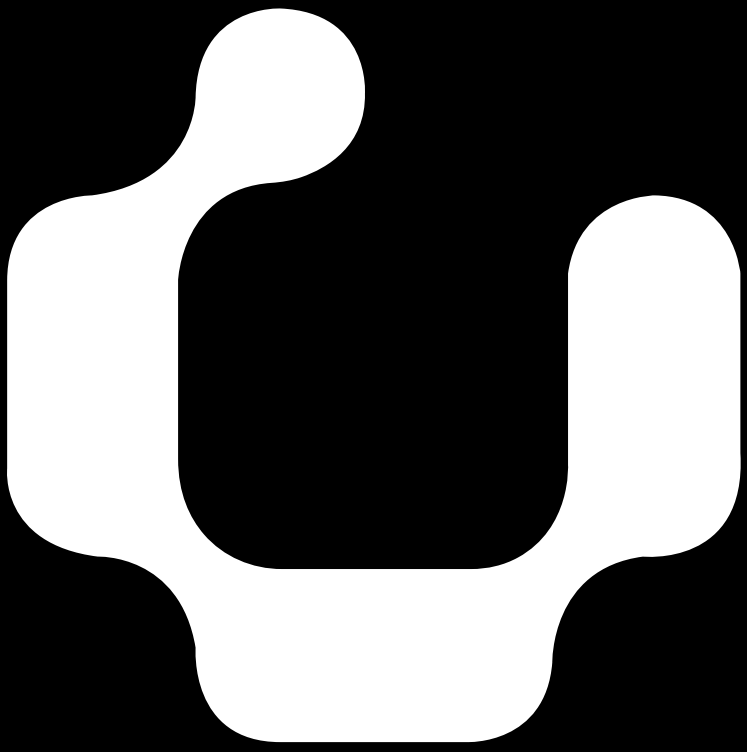

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk