U·LINK



UL-5BIR25FW-IP

5MP Outdoor Bullet Camera Fixed Lens

POWERING THE FUTURE



Features

- IP Bullet Camera.
- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 3.6mm Fixed Lens.
- IR Distance 25m Max.
- With Internal POE.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	5MP
Effective pixels	2616x1964p
Compression	H.264/H.265/JPEG/AVI
Audio Compression	G711A/U
TV System	PAL/NTSC
Electronic Shutter Time	Auto: 1/3-1/100000Sec
Minimun Illumination	Color: 0.006 Lux @ (F1.6, AGC ON), B/W: 0 Lux With IR
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network

Lens

Focal Length & FOV	3.6mm, Horizontal FOV 88°, Vertical FOV 44°, Diagonal FOV 105°
Lens Type	Fixed Focal Lens, 3.6
Focus Control	Fixed
Aperture	F1.6
Pixels	5MP

Night Vision

Infrared LED	42μ x 2 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, IPv4/v6 ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPOE, NTP, SMTP, UDP, SNMP, Qos,802.1x
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes
POE	Support IEEE 802.3af
Main Stream 1	2592x1944@30fps
Main Stream 2	2560x1440@30fps
Main Stream 3	1920x1080@30fp - 1280x720@30fps
Sub Stream 1	1280x720@30fps
Sub Stream 2	720x480@30fps
IE Browser	E8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, Android

AI Function

Intelligent Analysis	Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection (Based On Human Detection), Motion Detection Based On Human Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC
Full Color	N/A
Corridor Pattern	Support
ROI	Support
BLC	Support
WDR	120dB
Motion Detection	Support (Support Enable The Detection Based On Human Movement Only)
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional 1 Built-in MIC
SD Card Slot	Optional Internal, Support Max 512GB

General

Housing	Metal, IP67
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension WxHxD	Φ171×73×70mm
Weight	750g

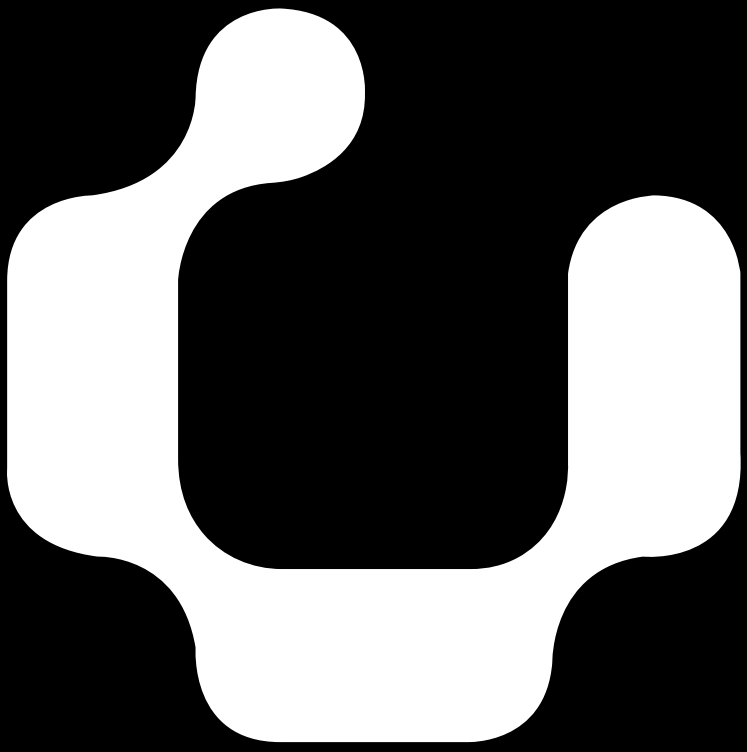

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk