U·LINK



UL-5BIR40FMFC-IP

5MP Full Color Bullet Camera Fixed Lens

POWERING THE FUTURE



Features

- Full Color Bullet Camera.
- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 2.8mm Fixed Lens.
- Suport Warm White (4000K), Up To 40m.
- With Internal POE & SD Card Slot.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	5MP
Effective Pixels	2616x1964p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network

Lens

Focal Length	Board Lens 2.8mm/F1.0
Focus Control	Fixed
Lens Type	Fixed
Pixels	5MP

Night Vision

Infrared LED	No, Support Warm light LED 4000K, Up To 40m
Infrared Distance	Up to 40m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPOE, NTP, SMTP, UDP, SNMP
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Optional/Internal, Support IEEE 802.3af
Video Delay	0.35 (Within The Lan)
Main Stream 1	2592x1944@30fps
Main Stream 2	2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	1280x720@30fps - 720x480@30fps
Sub Stream 2	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection, Motion Detection Based On Human Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC, Distortion
Full Color	Support
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	HDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional Audio In/Out
Alarm	Optional 1CH Input/Output
SD Card Slot	Optional Internal, Support Max 512GB

General

Housing	Metal, IP67
Anti-Cut Bracket	No
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12Vt10%, 1000mA
Dimension WxHxD	Φ268x95x88mm
Weight	1500g

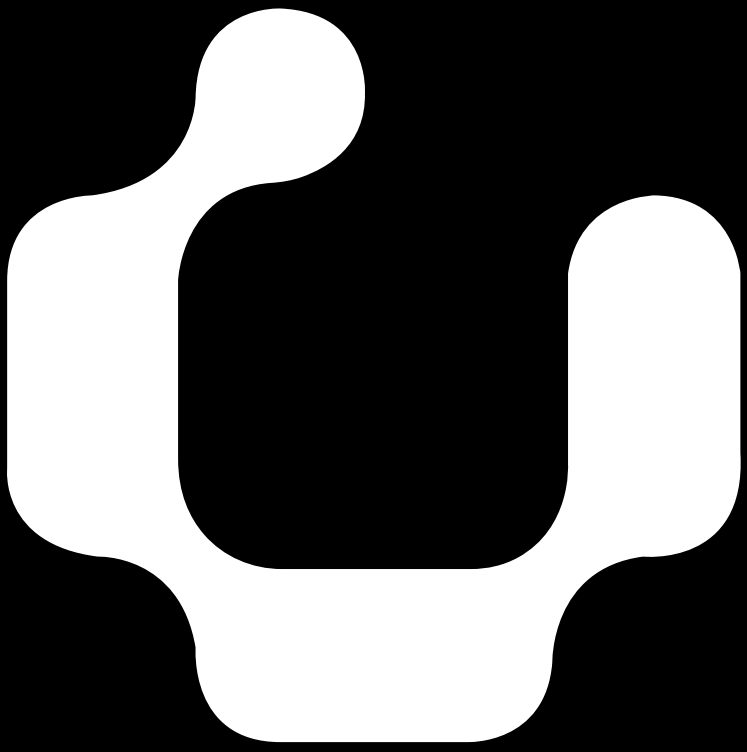

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk