U·LINK



UL-5BIR60F-IP

5MP Outdoor Bullet Camera Fixed Lens

POWERING THE FUTURE



Features

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- Progressive Scanning System.
- H.264/H.264+/H.265/H.265+/JPEG/AVI/MPEG Compression Method.
- IR Distance 60m Max.
- With Internal POE & External SD Card Slot.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	5MP
Effective Pixels	2616x1964p
Compression	H.264/H.264+/H.265/H.265+/PEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: 1/3-1/100000Sec
Minimun Illumination	Color: 0.003 Lux@F1.6, AGC On, B/W: 0 Lux With IR On
S/N Ratio	60dB
Scanning System	Progressive
Video Output	Network

Lens

Focus Length	2.8mm, Horizontal FOV 107°, Vertical FOV 57°, Diagonal FOV 128° 3.6mm, Horizontal FOV 88°, Vertical FOV 44°, Diagonal FOV 105° 6mm, Horizontal FOV 54°, Vertical FOV 29°, Diagonal FOV 63°
Focus Control	Fixed
Lens Type	Fixed Focal Lens, 3.6,2.8, & 6mm Optional
Aperture	F1.6
Pixels	5MP

Night Vision

Infrared LED	42μ x 6 PCS
Infrared Distance	60m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 /10/100Base-TI
Protocol	TCP/IP, IPV4/V6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPOE, NTP, SMTP, UDP, SNMP, Qos,802.1x
ONVIE	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes
POE	Internal, Support IEEE 802.3af
Video Delay	0.35 (Within The Lan)
Main Stream 1	2592x1944@30fps
Main Stream 2	2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	1280x720@30fps
Sub Stream 2	720x480@30fps
Sub Stream 3	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection (Based On Human & Vehicle Detection), Line Cross Detection (Based On Human & Vehicle Detection), Loiter Detection, People Gather Detection (Based On Human Detection), Motion Detection Based On Human Detection

Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3DNR, White Balance, Anti Flicker, Video Tampering, HLC, Distortion
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	120dB
Motion Detection	Support (Support Enable The Detection Based On Human Movement Only)
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio Compression	G711A/U,AAC
SD Card Slot	Optional Internal, Built in 4G Storage

General

Housing	Cover: Plastic Main Body: Metal IP67
IR Cut Filter	Yes
Operation Temperature	From -20 °C ~ +60°C RH95% Max
Storage Temperature	From -20 °C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1100mA
Dimension WxHxD	Φ179x90x90mm
Weight	1.65Kgs



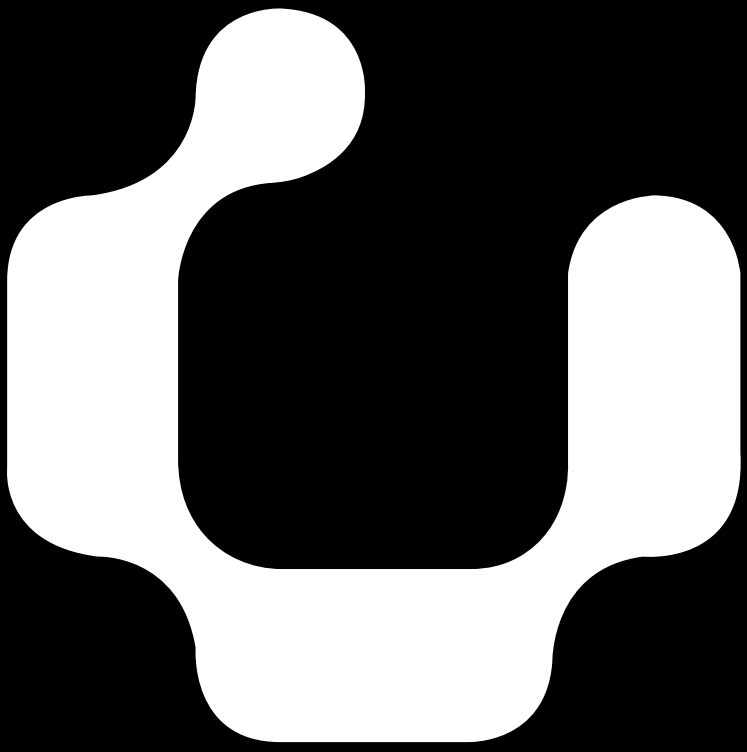

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk