U·LINK



UL-5BIR60V-IP

5MP Outdoor Bullet Camera VF Lens

POWERING THE FUTURE



Features

- 1/2.7" SmartSens CMOS Sensor.
- H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG Compression Method.
- Varifocal Lens 2.8-12mm.
- Infrared Distance 60m Max.
- IP67 Outdoor Metal Case.

Specification

Camera

Image Sensor	1/2.7" SmartSens CMOS Sensor
Resolution	5MP
Effective Pixels	2888x1628p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Varifocal
Pixels	5MP

Night Vision

Infrared LED	42μ x 6 PCS
Infrared Distance	60m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,PPPoE, NTP, UPnP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	2880x1620@30fps
Main Stream 2	2592x1536@30fps - 2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	1280x720@30fps
Sub Stream 2	720x480@30fps
Tri Stream	1280x720@30fps - 720x480@30fps
IE Browser	IE8-11, Google Chrome, Firefox , Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Intrusion Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	DWDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional

General

Housing	Metal ,IP67 Outdoor Camera
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1100mA
Dimension WxHxD	Φ211x92x90mm
Weight	1400g

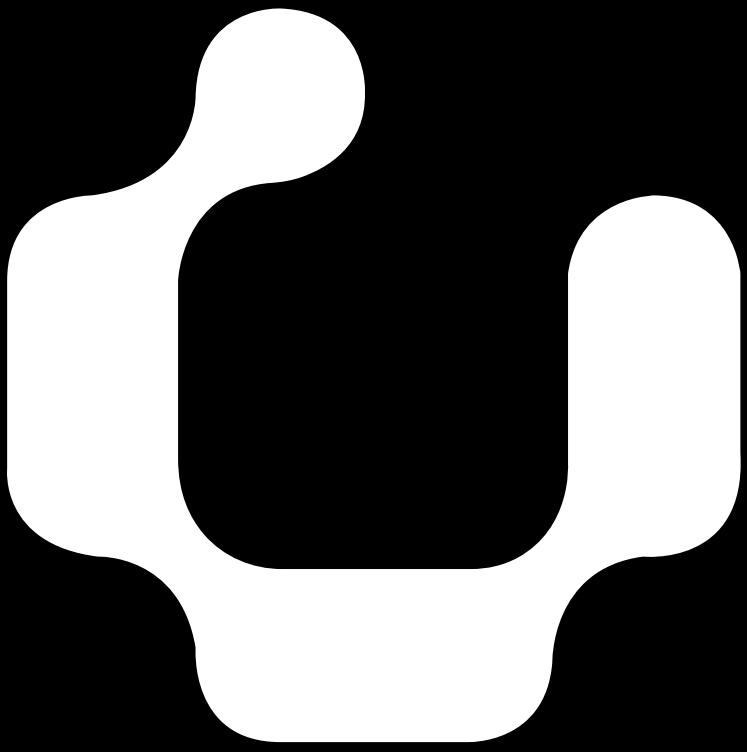

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk