U·LINK



UL-5DIR30V-IP

5MP Outdoor Dome VF Lens

POWERING THE FUTURE



Features

- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.264/H.264+/H.265/H.265+/JPEG/AVI.
- Supplement Light Distance 25m.
- IP67 Outdoor Metal Case.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	5MP
Effective Pixels	2616x1964p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI
TV System	PAL/NTSC
Electronic Shutter Time	Auto: 1/3-1/100000Sec
Minimun Illumination	Color: 0.006 Lux @ F1.6, AGC On, B/W: 0 Lux With IR On
S/N Ratio	60dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focal Length	2.7-13.5mm Motor Zoom, Horizontal FOV 103°-29°, Vertical FOV 54°-16°, Diagonal FOV 124°-33°
Focus Control	Auto
Lens Type	Auto
Pixels	5MP

Night Vision

Infrared LED	42μ x 2 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP,IPv4/v6, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, NTP, SMTP, UDP, SNMP, Qos,802.1x
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	2592x1944@30fps
Main Stream 2	2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	1280x720@30fps
Sub Stream 2	720x480@30fps
IE Browser	E8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, Android

AI Function

Intelligent Analysis	Intrusion Detection (Based On Human & Vehicle Detection), Line Cross Detection (Based On Human & Vehicle Detection), Loiter Detection (Based On Human Detection), People Gather Detecion (Based On Human Detection), Motion Detection Based On Human Detection, Enter Area (Based On Human & Vehicle Detection), Leave Area (Based On Human & Vehicle Detection)



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, Anti Flicker, Video Tampering, HLC
Corridor Pattern	Support
Defog Mode	N/A
ROI	Support
BLC	Support
WDR	Support
Motion Detection	Support (Support Enable The Detection Based On Human Movement Only)
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional 1 Built-in MIC
Alarm	N/A
SD Card Slot	Optional Internal, Support Max 1TB

General

Housing	Metal, IP67
Anti-Cut Bracket	No
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension WxH	Φ115x113mm
Weight	800g

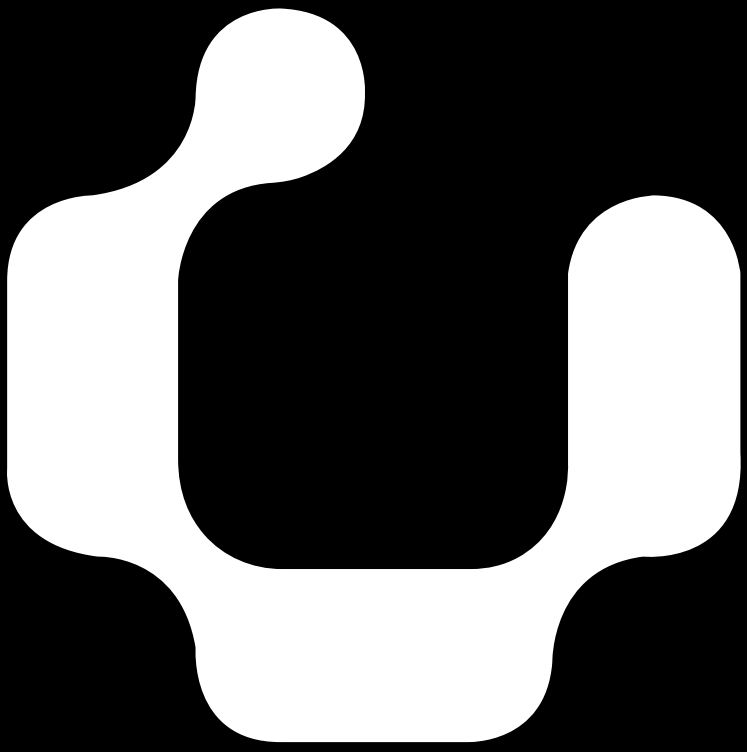

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk