U·LINK



UL-64NVR4K816-IP

64CH 4K/8MP with 8SATA, 1eSATA NVR

POWERING THE FUTURE



Features

- Support Ultra265/H.265/H.264 Video Formats.
- 64CH Input.
- Third-Party IP Cameras Supported With ONVIF Conformance: Profile S, Profile G, Profile T.
- Support 2CH HDMI, 1CH VGA, HDMI1 & HDMI2 Up To 4K (3840x2160) Resolution.
- HDMI1, HDMI2, VGA Independent Outputs Provided.
- Up To 8MP Resolution Recording.
- Support RAID 0 , 1 , 5 , 6 , 10
- 8SATA HDDs, Up To 16TB For Each HDD.
- Various Fisheye Dewarping Modes For Live View & Playback For Both Web Interface & GUI.
- Support N1+ Hot Spare.
- Support For 12V Power Output.
- ANR Technology To Enhance The Storage Reliability When The Network Is Disconnected.
- Support Cloud Upgrade.

Specification

Video/Audio Input

IP Video Input	64CH
Two-Way Audio Input	1CH, RCA

Network

Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE

Video/Audio Output

HDMI/VGA Output	VGA: 1920×1080p/60Hz, 1920×1080/50Hz, 1600×1200/60Hz, 1280x1024/60Hz, 1280×720/60Hz, 1024x768/60Hz HDMI1/HDMI2 (HDMI Audio Output Is Not Supported), 4K (3840×2160)/30Hz, 1920x1080p/60Hz, 1920×1080/50Hz, 1600x1200/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1CH, RCA
Synchronous Playback	16CH
Corridor Mode Screen	3/4/5/7/9/10/12/16/32

Decoding

Decoding Format	Ultra 265, H.265, H.264
Live View Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	4 x 4K@30, 8 × 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P @25, 36 x 720P@30, 64 x D1

Hard Disk

SATA	8SATA interfaces
Capability	Up To 16TB For Each HDD
eSATA	1eSATA Interface

Disk Array

Array Type	RAID 0, 1, 5, 6, 10

External Interface

Network Interface	2 RJ45 10M/100M/1000M Self-Adaptive Ethernet Interfaces
Serial Interface	1 RS232, 1 RS485
USB Interface	Front Panel: 2 USB2.0, Rear Panel: 1 USB3.0
Alarm In	16CH
Alarm Out	4CH

General

Power Supply	100~240 VAC Power Consumption: ≤ 25W (Without HDD)
Working Environment	-10°C~+55°C (+14°F ~ +131°F), Humidity ≤ 90%RH (Non-Condensing)
Dimensions WxDxH	Φ442x426x89mm (17.4"x16.8"x3.5")
Weight	≤ 5.7Kg (12.57lb) (Without HDD)



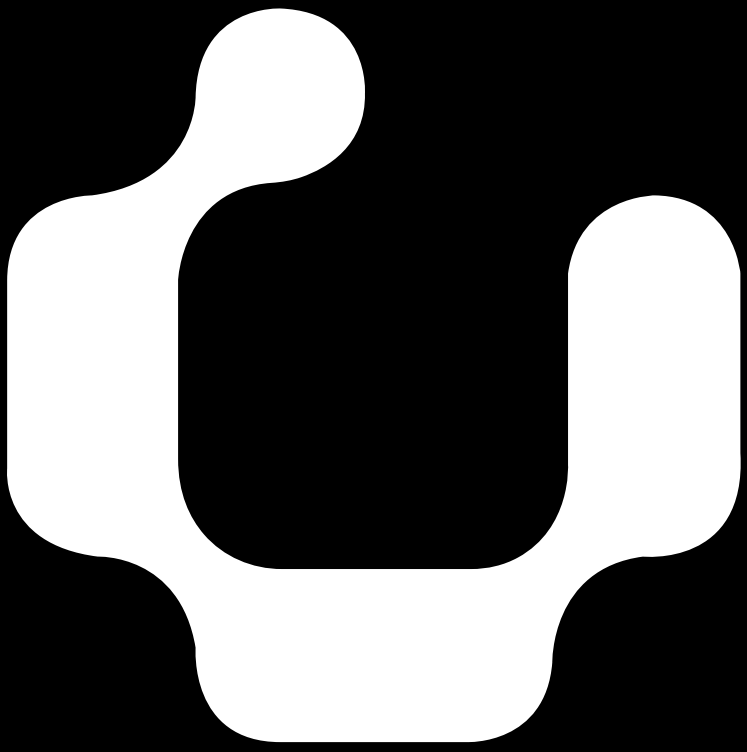

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk