U·LINK



UL-64NVR4KEM8-IP

64CH 4K/12MP with 8SATA, 1eSATA NVR

POWERING THE FUTURE



Features

- Support Ultra H.265/H.265/H.264 Video Formats.
- 64CH Input.
- Third-Party IP Cameras Supported With ONVIF Conformance: Profile S, Profile G, Profile T.
- Support 2CH HDMI, 1CH VGA, HDMI1 & HDMI2 uUp To 4K (3840×2160p) Resolution.
- HDMI1, HDMI2, VGA Independent Outputs Provided.
- Up to 12MP Resolution Recording.
- Support RAID 0, 1, 5, 6, 10.
- 8SATA HDDs, Up To 16TB For Each HDD.
- Various Fisheye Dewarping Modes For Live View & Playback For Both Web Interface & GUI.
- Support N1+ Hot Spare.
- Support For 12V Power Output.
- ANR Technology To Enhance The Storage Reliability When The Network Is Disconnected.
- Support Cloud Upgrade.

Specification

Video

IP Video Input	64CH
Video Output	HDMI/VGA Output

Audio

Two-Way Audio Input	1CH, RCA
Audio Output	1CH, RCA
Synchronous Playback	16CH
Corridor Mode Screen	3/4/5/7/9/10/12/16/32

Alarm

Alarm In	16CH
Alarm Out	4CH

Display

HDMI/VGA Output	VGA: 1920×1080p/60Hz, 1920×1080p/50Hz, 1600×1200/60Hz, 1280×1024/60Hz, 1280x720/60Hz, 1024×768/60Hz HDMI1/HDMI2 (HDMI Audio Output Is Not Supported): 4K (3840×2160)/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600×1200/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz

Recording

Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

Playback & Backup

Decoding Format	Ultra 265, H.265, H.264
Decode Capability	2 x 12MP@30, 4 x 4K@30, 8 x 4MP@30, 9 x 4MP@25, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1
Live View/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF

Network

interface	2 RJ45 10M/100M/1000M Aelf-Adaptive Ethernet Interfaces
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbos
Serial Interface	1 RS232, 1 RS485
USB Interface	Front Panel: 2 USB2.0, Rear Panel: 1 USB3.0
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPOE

Storage

SATA	8SATA Interfaces
eSATA	1eSATA Interface
Array Type	RAID 0, 1, 5, 6, 10
Capacity	Up To 16TB For Each HDD

General

Power Supply	100~240 VAC Power Consumption: ≤ 25W (Without HDD)
Working Environment	-10°C ~ +55°C (+14°F ~ +131°F), Humidity ≤ 90%RH (Non-Condensing)
Dimensions WxDxH	Φ442x426x89mm (17.4"x16.8"x3.5")
Weight	≤ 5.7Kg (12.57lb) (Without HDD)



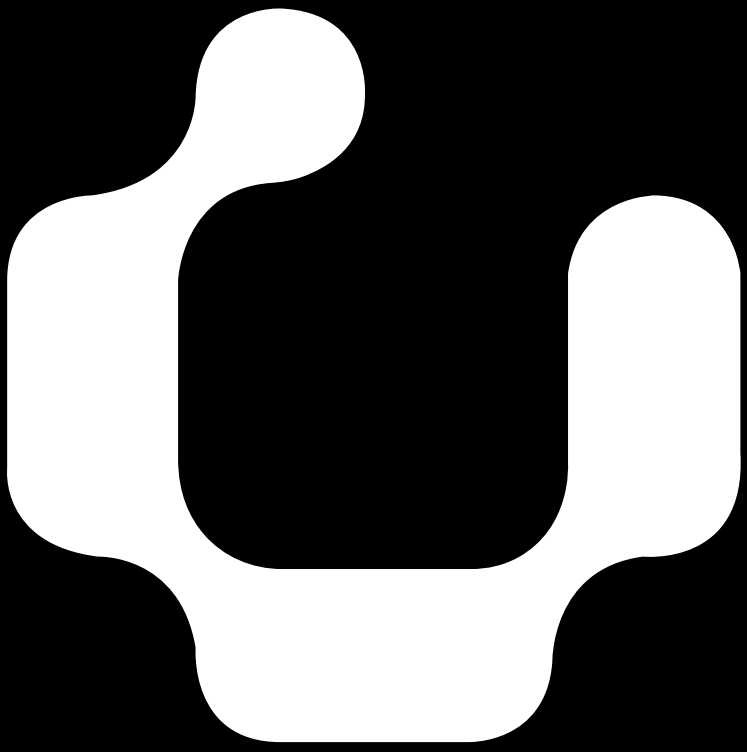

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk