U·LINK



UL-8BIR20F-IP

8MP Outdoor Bullet Camera Fixed Lens

POWERING THE FUTURE



Features

- Value IP Bullet Camera.
- 1/2.7" SmartSens CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 3.6mm Fixed Lens.
- IR Distance 20m Max.
- With Internal POE & SD Card Slot.

Specification

Camera

Image Sensor	1/2.7" Smartens CMOS Sensor
Resolution	8MP
Effective Pixels	3872x2180p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional
White Balance	Auto/Manual
Manual/Auto Iris	Yes

Lens

Focus Length	3.6mm
Focus Control	Fixed
Lens Type	Fixed
Pixels	8MP

Night Vision

Infrared LED	42μ x 2 PCS
Infrared Distance	20m
IR Status	Auto Control
IR Power On	Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP, UDP
ONVIF	Support ONVIF 2.4 (Profile S/T/G)
P2P	YES, Support QR Code
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within the Lan)
Main Stream 1	3840x2160 @20fps
Main Stream 2	2592x1536@20fps - 2560x1440@30fps
Main Stream 3	1920x1080@20fps - 1280x720@20fps
Sub Stream 1	1280x720@20fps
Sub Stream 2	720x480@20fps
Tri Stream	1280x720@20fps - 720x480@20fps
IE Browser	IE8-11, Google Chrome, Firefox , Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC, Distortion
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	WDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional 1 Built-in MIC
SD Card Slot	Optional Internal, Support Max 512GB

General

Housing	Metal ,IP67
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension WxHxD	Φ171×73×70mm
Weight	750g

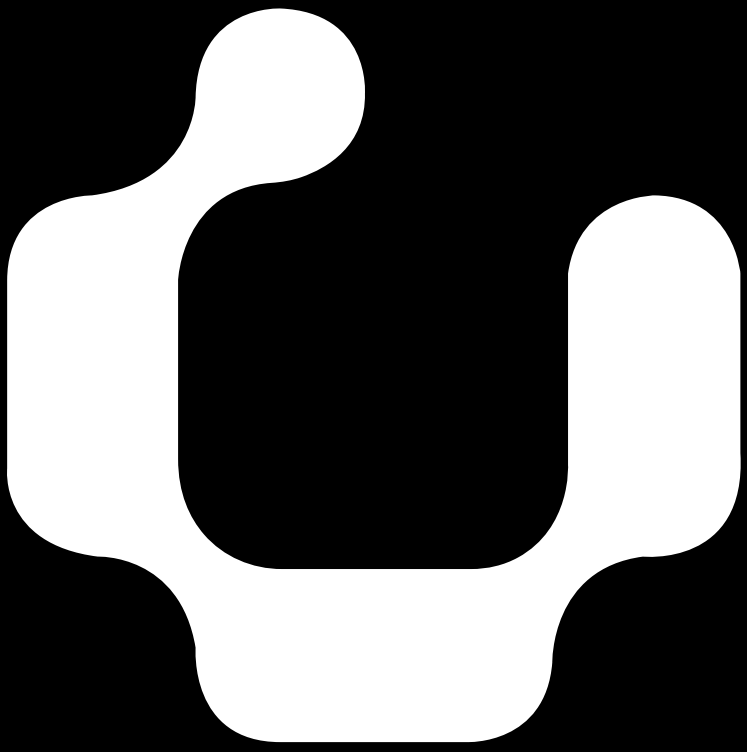

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk