U·LINK



UL-8BIR60VM-IP

8MP Outdoor Bullet Camera 3X Motorized Zoom

POWERING THE FUTURE



Features

- 1/1.8" OV High-Resolution CMOS Sensor.
- H.264/H.265 Compression Method.
- 3.6-11mm 3X Motor Zoom Auto Focus Lens.
- IR Distance 60m Max.
- IP67 Outdoor Metal Case.
- With Internal POE & SD Card Slot.

Specification

Camera

Image Sensor	1/1.8" OV High-Resolution CMOS Sensor
Resolution	8MP
Effective Pixels	3840x2160p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec, NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional

Lens

Focal Length	3.6-11mm
Focus Control	Auto
Lens Type	Motorized
Pixels	8MP

Night Vision

Infrared LED	42μx 6 PCS
Infrared Distance	60m
IR Status	Auto Control
IR Power On	Auto Control

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP
ONVIF	Support ONVIF 2.4 (Profile S/T)
P2P	Yes, Support QR Code
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	3840x2160 @20fps - 3072x2048@30fps
Main Stream 2	2592x1944@30fps - 2560x1920@30fps
Main Stream 3	2560x1440@30fps -1920x1080@30fps - 1280x720@30fps
Sub Stream 1	720x480@20fps - 720x480@30fps
Tri Stream	352x288@20fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	iPhone, iPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection, Motion Detection Based On Human Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	WDR: 96dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web

Interface

Audio	2Way Audio
Alarm	1CH Input/Ouput
SD Card Slot	Optional, Support Max 512GB

General

Housing	Metal ,IP67
Anti-Cut Bracket	Yes
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1100mA
Dimension WxHxD	Φ179x90x90mm
Weight	1,65Kgs

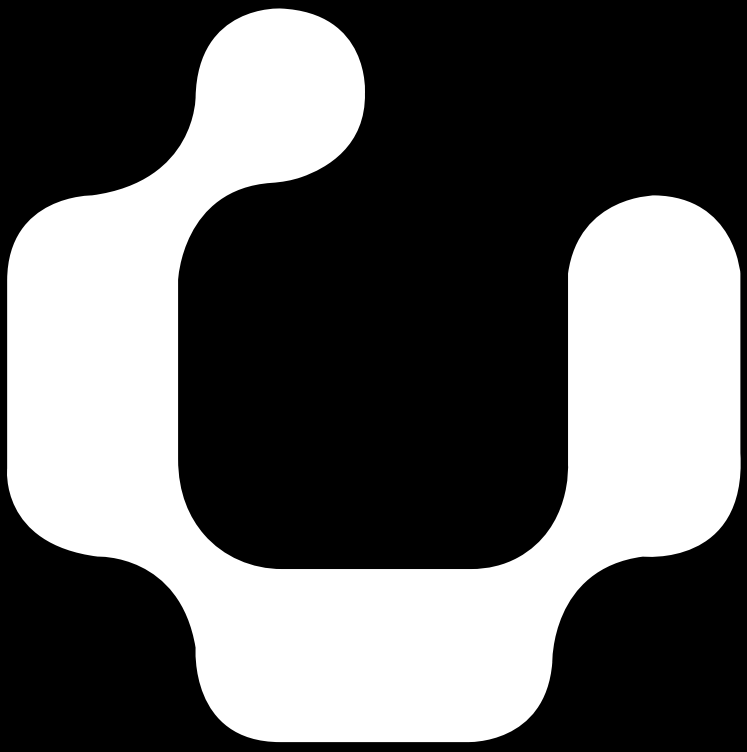

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk