U·LINK



UL-8DIR25V-IP

8MP Outdoor Dome Camera VF Lens

POWERING THE FUTURE



Features

- Pro IP Dome Camera.
- 1/2.8" SONY Starvis Back-illuminated CMOS Sensor.
- H.265+/H.265/H.264+/H.264 Compression Method.
- 2.7-13.5mm Motorized Lens.
- IR Distance 25m Max.
- With Internal POE & External SD Card Slot.

Specification

Camera

Image Sensor	1/2.8" SONY Starvis Back-illuminated CMOS Sensor
Resolution	8MP
Effective Pixels	3864x2192p
Compression	H.264/H.264+/H.265/H.265+/JPEG/AVI/MJPEG
TV System	PAL/NTSC
Electronic Shutter Time	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
Minimun Illumination	0.01 Lux
S/N Ratio	≥52dB
Scanning System	Progressive
Video Output	Network
Reset Button	Optional
White Balance	Auto/Manual
Manual/Auto Iris	Yes

Lens

Focal Length	2.7-13.5mm Motor Zoom
Focus Control	Fixed
Lens Type	Fixed
Pixels	8MP

Night Vision

Infrared LED	42μ x 2 PCS
Infrared Distance	25m
IR Status	Auto Control
IR Power On	Smart, Manual & Timed Mode

Network

Ethernet	RJ-45 (10/100Base-T)
Protocol	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP, UDP, SNMP
ONVIF	Support ONVIF 19.12 (Profile S/T/G)
P2P	Yes, Support QR Code
POE	Internal, Support IEEE 802.3af
Video Delay	0.3S (Within The Lan)
Main Stream 1	3840x2160 @30fps - 3072x2048@30fps
Main Stream 2	2592x1536@30fps - 2560x1440@30fps
Main Stream 3	1920x1080@30fps - 1280x720@30fps
Sub Stream 1	1280x720@30fps - 720x480@30fps
Sub Stream 2	352x288@30fps
Tri Stream	1280x720@30fps - 720x480@30fps - 352x288@30fps
IE Browser	IE8-11, Google Chrome, Firefox, Mac Safari
Smart Phone	IPhone, IPad, Android, Android Pad

AI Function

Intelligent Analysis	Face Detection, Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection, Motion Detection Based On Human Detection



Camera Features

Day/Night	Color/ B&W (IR-CUT)
Image Config	Saturation, Brightness, Contrast, Sharpness, Mirror, 3D NR, White Balance, FLK (Flicker Control), Video Tampering, HLC, Distortion
Corridor Pattern	Support
Defog Mode	Support
ROI	Support
BLC	Support
WDR	WDR: 120dB
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
Recording Mode	NVR/CMS/Web
Language	English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese

Interface

Audio	Optional Audio IN/OUT
Alarm	Optional 1CH Input/Ouput
SD Card Slot	Optional External, Support Max 512GB, Built-in 4G Storage

General

Housing	Metal, IP67
Anti-Cut Bracket	Optional Wall Barcket
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +60°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10% 700mA
Dimension WxH	Φ136x148mm
Weight	1700g

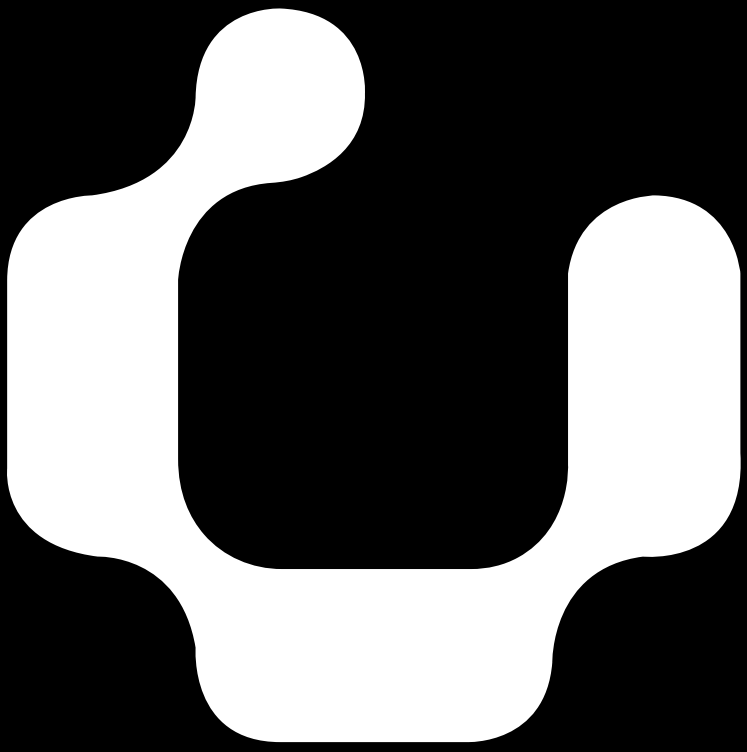

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk