U·LINK



UL-NVR-EM0128-4U

128CH 4K/5MP with 24SATA, 1eSATA NVR

POWERING THE FUTURE



Features

- Support 24HDD, HDD's Hot-Swap & RAID 0,1,5,6,10 Are All Supported.
- Flip-Open Chasis, Prepositive Slot Type HDD Installation, Reliable and easy-maintainable.
- Support i8sS Supper Protocol, Plug & Play, IPC No Needs IP.
- Support Third-Party ONVIF, RTSP Standard Network Camera.
- Support ONVIF Outward Passageway, Can Compatible With ONVIF Standard Video Management Software, & Support GB28181 Standard Protocol.
- Support 4K Video Preview, Storage & Playback.
- Support H264+, H264 Encoding Device Self-Adaptive Connection.
- 2 HDMI, 2 VGA Heterologous Output, Support 4K High Resolution Output.
- New GUI, Support Start Recording With One Key.
- Support IPC Centralized Management, Including IPC Parameter Configuration, Information Import/Out-Put, Two-Way Audio, Upgrade, etc.
- Support Double Password To Do Video Playback & Backup.
- Support Motion Detection Data Filler When Do Playback, Support Video Summary Playback.
- Support Time-Phased Playback, Assigned The Video To Multi-Screen Do Different Playback At Same Time.
- Support Smart Search, Playback & Backup.
- Support Smart Channel Grouping.
- Support Instant Playback For Screen Preview During Multi-Channel Display Mode.
- Max Support 16CH 1080p Playback & Multi Channels Reverse Playback.
- Support Multi-Channel Image Play & Thumbnail Play.
- Support Smart Detection Like Target Counting, Goods Leave Over, Goods Loss, Area.

Specification

Operation System	Embedded LINUX System
Image Code Control	Image Code Quality Adjustable, Variable Bit Stream
Dual Stream	Each Channel Can Set Main Stream & Sub Stream
Video Standard	H.264/H.265 Self-Adaption
Monitoring Image Quality	4K/5MP/3MP/1080P/960P/720P
Image Motion Image	Each Screen Can Set Multiple Detection Areas & Set 6-Level Sensitivity
Recording Playback Quality	Any 1CH/4CH/9CH/16CH Playback Simultaneously
Region Cover	Every Channel Can Set 4 Cover Regions
Recording Mode	Support Manual, Auto, Motion Detection, Alarm Trigger Record Mode
Backup Way	Support HDD, U-Disk, USB Mobile HDD, USB DVD-RW, Network Storage & Backup
Operation Way	Mouse, Keyboard
Local Login	User Name & Password
Recording Storage	Local HDD, Network

External Ports

Video Input	128CH input, Support 4K/5MP/3MP/2MP H.265/H.264 5M/CH
Audio Input	According To Network Video Channel Number Do 1:1 Network Audio Input
Video Output	2 VGA, 2 HDMI
Audio Port	1CH RCA Input, 1CH RCA Output
Network Port	2×10M/100M/1000M
RS485 Port	Full Duplex Standard 485 Ports
USB Port	1 USB 3.0, 2 USB 2.0
Alarm Input	16CH
Alarm Output	16CH

Hard Disk

HDD Port	24SATA + 1eSATA HDD Port
Max Capacity	Each Port Supports MAX 8TB HDD

Specification

Power Supply	ATX 110-220V 400W 50-60Hz
Network Protocol	ONVIF, IPv4, UPnP, NTP, SADP, PPPoE, DHCP, DNS, DDNS, NFS, SMTP, etc.
Power Consumption	≤ 50W (Without HDD)
Working Temperature	-10°C ~ +65°C
Working Humidity	10%-90%RH
Dimension WxHxD	Φ431.5x600x177.5mm
Weight	23kg (Without HDD)
Installation Way	Desktop Installation, Standard Cabinets Installation



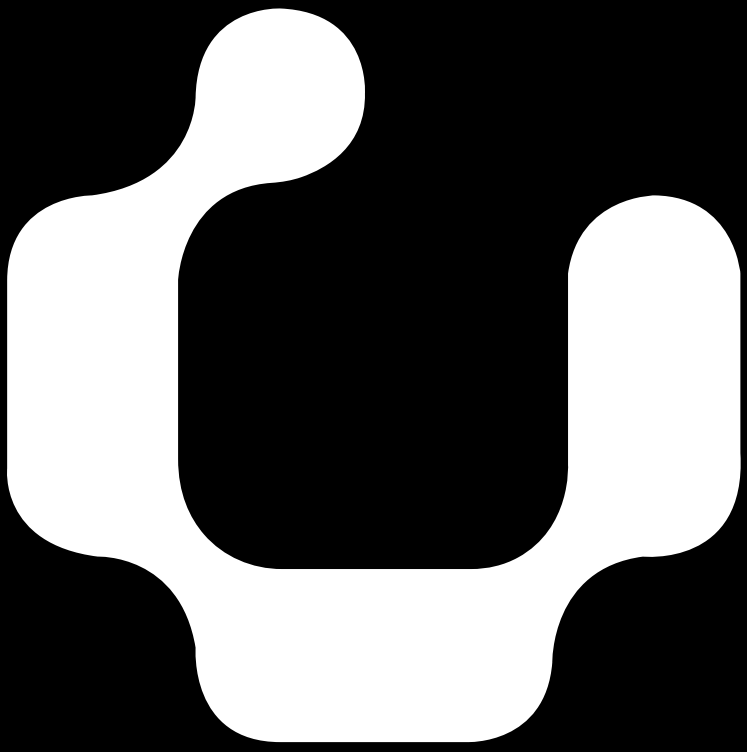

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk