U·LINK



UL-5DIR30V-AHD

5MP Indoor Dome Camera VF Lens

POWERING THE FUTURE



Features

- 1/2.5'' CMOS Sensor.
- AHD/CVI/TVI/CVBS 4in1
- 2.8-12mm Varifocal Lens.
- IR Distance Max 30m.
- IP66 Outdoor, OSD&UTC Support.

Specification

Camera

Image Sensor	1/2.5'' CMOS Sensor
Image Resolution	5M:2592x1944 4M:2560x1440 2M:1920x1080
Electronic Shutter	Auto
TV System	PAL/NTSC
Video Output Mode	AHD/TVI: 5M@20fps/12.5fps, 4M@30fps/15fps, 2M@30f-ps/25fps CVI: 4M@30fps/25fps, 2M@30fps/25fps
Scanning System	Progressive Scan

Lens

Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Varifocal

Night Vision

IR Cut Filter	Yes
Infrared LED	42µ x 4 PCS
Infrared Distance	30m
IR Status	AGC Auto Control

Camera Features

Day/Night	Yes
OSD Menu	Yes
WDR	DWDR
UTC	Yes
Noise Reduction	DNR
White Balance	Auto/Manual
Gain Control	Auto

General

Housing	Metal Housing IP66
Housing color	White
Dual Voltage	DC-12V
IR Cut Filter	Yes
Operation Temperature	-20°C ~ +50°C RH95% Max
Storage Temperature	-30°C ~ +50°C RH95% Max
Power Source	DC12V±10%, 550mA
Dimension WxH	Ø131x93mm
Weight	800g



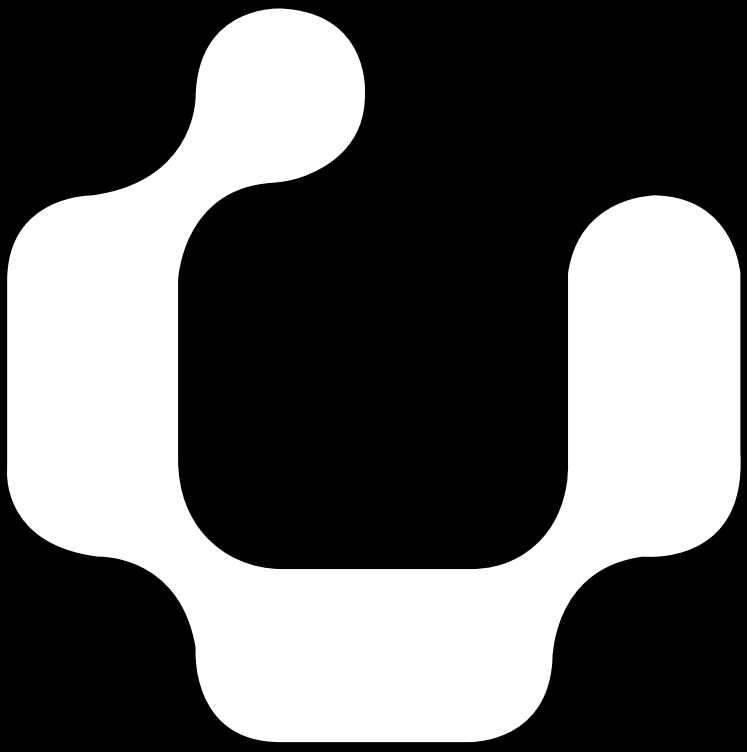

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk