U·LINK



UL-8XVRE

8CH 5MP with 1SATA Interface XVR

POWERING THE FUTURE



Features

- Support XVI/AHD/TVI/CVI/CVBS/IP.
- Support Up To 5MP AHD & 5MP IP Resolution Recording.
- Support VGA, HDMI Full HD Support Output Simultaneously.
- Support CVBS Output.
- Support Max 8CH AHD Or 16CH IP Camera Input.
- 1SATA port Max 14TB.

Specification

System

Main Processor	NT98321

Interface

Operating Interface	Support 16-bit True Color Graphical Menu Interface & Mouse Operation
Preview	1/4/8/9

Video

Codec	H.265+
Preview Ability	8*1080N (6in1)/4*5M-N (6in1)
Encode Ability	8*1080N@15fps (6in1)/4*5M-N@20fps (6in1)
Decode Ability	8*1080N@15fps (6in1)/4*5M-N@20fps (6in1)
Multi-Mode Input	AHD: 8*1080N;4*5M-N IP: 16*1080P;8*5M
Motion Detection	Each Screen Can Be Set To 192 (16x12) Detection Areas; Multi-level Sensitivity Can Be Set (Limited Local Channel)

Audio

Audio Compression	G.711A
Intercom	Support

Record & playback

Record Mode	Manual, Alarm, Motion Detection, Timing
Local Playback	4CH (Analog Input Mode)
Search Mode	Search By Time, Calendar, Event, Channel

Storage & backup

Video Storage	HDD, Network
Backup Mode	Network, USB Hard Disk, USB Burner, SATA Burner

External Interface

Video Input	8CH BNC
Video Output	1CH VGA,1CH HDMI
Audio Input	1CH
Audio Output	1CH
Network Interface	RJ45 10M/100M
PTZ Control	Support Kinds Of PTZ Protocols
USB	2 USB 2.0 Ports
HDD	1SATA Port (Max 14TB)
Wireless	3G, WiFi (Extend Via USB)

General

Power supply	12V/2A
Power Consumption	≤ 15W (Without HDD)
Working environment	Temperature: 0°C ~ +55°C, Humidity: 10% ~ 90%, Atm: 86kpa ~ 106kpa
Weight	1.5KG

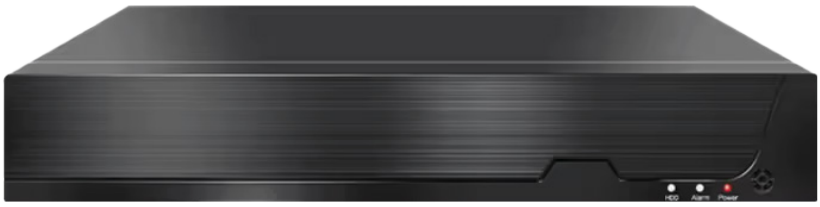

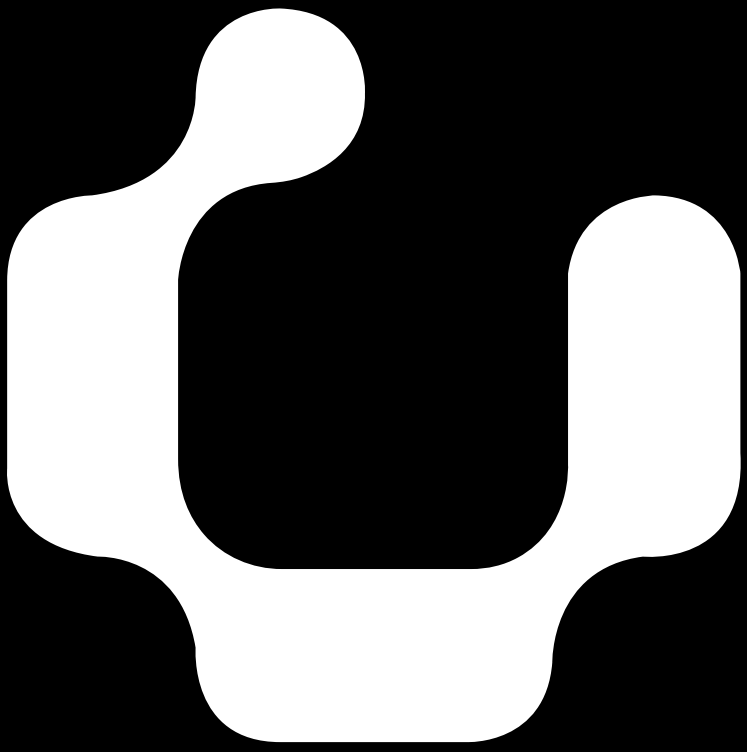

U·LINK

POWERING THE FUTURE

Email:
info@u-link.uk

Address:
Sydney House, 62 Lancaster Way, Ely,
Cambridgeshire, CB6 3NW, UK

Website:
https://u-link.uk